

Calibration Datasets - TerraMatch

TerraMatch compares landscape patterns (slopes, buildings etc) across flightlines and determines errors. This would be time consuming to do on all of the data in our project.

Up until now our created blocks have just been blocks. Now we need to subset them in a way. For calibration we choose blocks to calibrate and we will consider these “calibration” blocks, instead of the original project blocks (referred to as “survey” blocks).

This works for determining boresight errors because they are systematic (the same throughout the survey).

Calibration Datasets - TerraMatch

TerraMatch compares landscape patterns (slopes, buildings etc) across flightlines and determines errors. This would be time consuming to do on all of the data in our project.



Up until now our created blocks have just been blocks. Now we need to subset them in a way. For calibration we choose blocks to calibrate and we will consider these “calibration” blocks, instead of the original project blocks (referred to as “survey” blocks).

This works for determining boresight errors because they are systematic (the same throughout the survey).

When choosing your blocks to calibrate it is best to choose some that cover the most flightlines and have comparable features. You should be able to determine this by creating a profile and stepping through the project looking for buildings or by loading it into arcmap and comparing to a basemap. In his study project we did the calibration on a third of the blocks as it seemed like a good subset.

Calibration Datasets - TerraMatch

To do the calibration we need to physically separate the calibration blocks from the survey blocks so that we can run processes on only those blocks. The method for doing this is by going into windows explorer, copying the blocks that you are using for calibration in your blocks folder and copying those blocks to a newly established calibration folder.

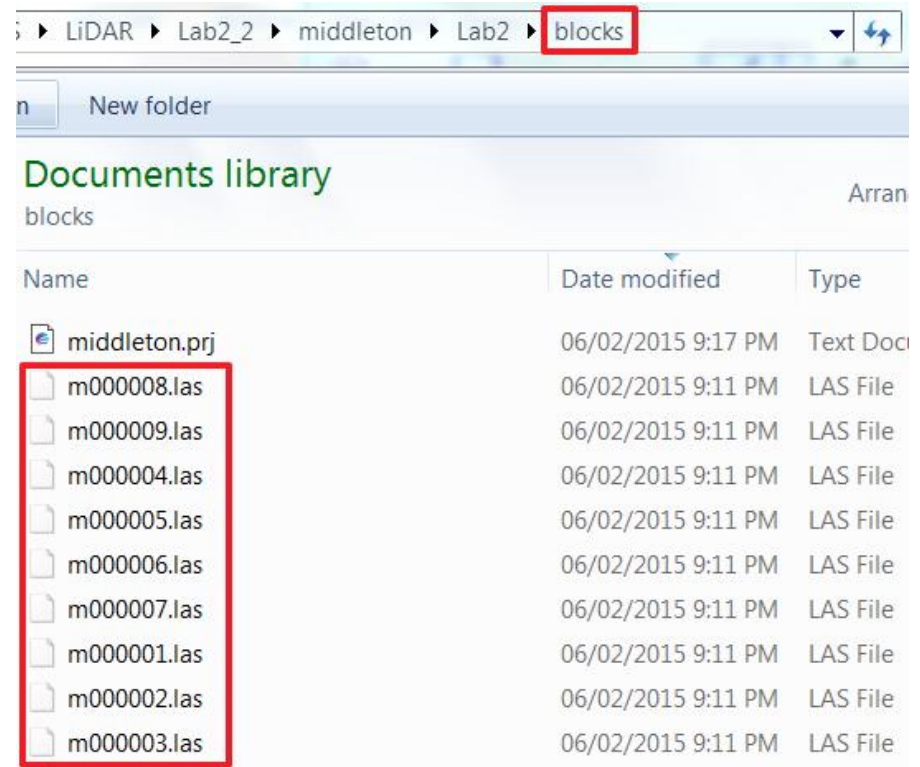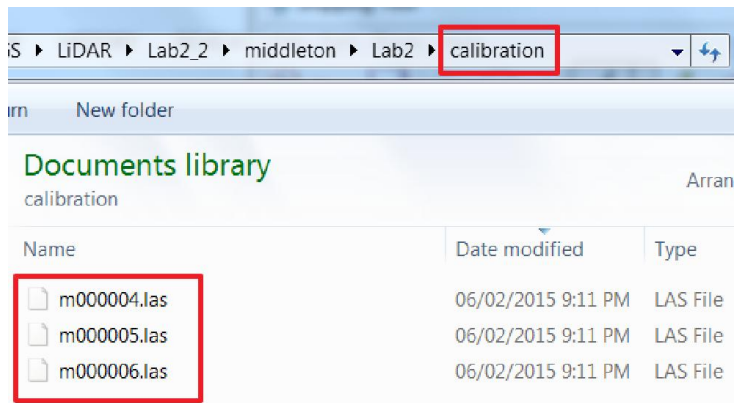

Calibration Datasets – Edit Project information

To point to your newly subsetted data you can either create entirely new projects in Microstation and TerraScan, OR you can just tell your project to look at a different blocks folder (recommended).

